


SYSTEM 10 & RUSTIQUE – STYLE LIMITATIONS



1. ALL STYLES ARE SHOWN AS VIEWED FROM THE OUTSIDE
2. THE HINGED SIDE OF THE VENT IS DESIGNATED BY THE POINT OF CONTACT BETWEEN THE WINDOW FRAME COMPONENT AND THE PINNACLE OF THE TRIANGLE DEPICTING THE VENT.
3. THE MAXIMUM TOP HUNG 1250 x 1250mm AND THE MAXIMUM SIDE HUNG 1350 x 700mm
4. THE INDIVIDUAL FRICTION STAY MANUFACTURERS WEIGHT CAPABILITIES SHOULD BE REFERED TO WHEN CALCULATING MAXIMUM SASH SIZES AND SEALED UNIT CONFIGURATIONS.

WINDOW STYLE	OUTERFRAME		OUTERFRAME		P10503/P10533 P10506/P10536 S00187		P10503/P10533 P10506/P10536 S00155		P10513/43/15/45 S00158 OR P10504 & S00174		DESIGN WIND PRESSURE
	MINIMUM W	H	MAXIMUM W	H	MAXIMUM W	H	MAXIMUM W	H	MAXIMUM W	H	
	400	400	2000	2000							800 Pa
	400	400	2000	2000							1200 Pa
	400	400	2000	2000							1600 Pa
	400	400	2000	2000							2000 Pa
	400	400	2000	2000							2400 Pa
	400	400	700	1350							800 Pa
	400	400	700	1350							1200 Pa
	400	400	700	1350							1600 Pa
	400	400	700	1350							2000 Pa
	400	400	700	1350							2400 Pa
	400	400	1250	1250							800 Pa
	400	400	1250	1250							1200 Pa
	400	400	1250	1250							1600 Pa
	400	400	1250	1250							2000 Pa
	400	400	1250	1250							2400 Pa
	400	800			1250	2400	1250	2400	1250	2400	800 Pa
	400	800			1250	2400	1250	2400	1250	2400	1200 Pa
	400	800			1250	2400	1250	2400	1250	2400	1600 Pa
	400	800			1200	2400	1225	2400	1250	2400	2000 Pa
	400	800			1150	2400	1175	2400	1250	2400	2400 Pa
	400	800			700	2400	700	2400	700	2400	800 Pa
	400	800			700	2400	700	2400	700	2400	1200 Pa
	400	800			700	2400	700	2400	700	2400	1600 Pa
	400	800			700	2400	700	2400	700	2400	2000 Pa
	400	800			700	2400	700	2400	700	2400	2400 Pa
	400	800			1250	2400	1250	2400	1250	2400	800 Pa
	400	800			1250	2400	1250	2400	1250	2400	1200 Pa
	400	800			1250	2400	1250	2400	1250	2400	1600 Pa
	400	800			1200	2400	1225	2400	1250	2400	2000 Pa
	400	800			1150	2400	1175	2400	1250	2400	2400 Pa
	400	800			1500	2000	1550	2000	1775	2400	800 Pa
	400	800			1350	2000	1400	2000	1575	2000	1200 Pa
	400	800			1250	2000	1300	2000	1475	2000	1600 Pa
	400	800			1200	2000	1250	2000	1375	2000	2000 Pa
	400	800			1150	2000	1175	2000	1325	2000	2400 Pa
	400	800			700	2400	700	2400	700	2400	800 Pa
	400	800			700	2400	700	2400	700	2400	1200 Pa
	400	800			700	2400	700	2400	700	2400	1600 Pa
	400	800			700	2400	700	2400	700	2400	2000 Pa
	400	800			700	2400	700	2400	700	2400	2400 Pa
	800	400			3600	1250	3600	1250	3600	1250	800 Pa
	800	400			3600	1250	3600	1250	3600	1250	1200 Pa
	800	400			3600	1250	3600	1250	3600	1250	1600 Pa
	800	400			3600	1200	3600	1225	3600	1250	2000 Pa
	800	400			3600	1150	3600	1175	3600	1250	2400 Pa

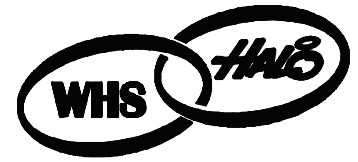

SYSTEM 10 & RUSTIQUE – STYLE LIMITATIONS

1. ALL STYLES ARE SHOWN AS VIEWED FROM THE OUTSIDE
2. THE HINGED SIDE OF THE VENT IS DESIGNATED BY THE POINT OF CONTACT BETWEEN THE WINDOW FRAME COMPONENT AND THE PINNACLE OF THE TRIANGLE DEPICTING THE VENT.
3. THE MAXIMUM TOP HUNG 1250 x 1250mm AND THE MAXIMUM SIDE HUNG 1350 x 700mm
4. THE INDIVIDUAL FRICTION STAY MANUFACTURERS WEIGHT CAPABILITIES SHOULD BE REFERED TO WHEN CALCULATING MAXIMUM SASH SIZES AND SEALED UNIT CONFIGURATIONS.

WINDOW STYLE	OUTERFRAME		OUTERFRAME		P10503/P10533 P10506/P10536 S00187		P10503/P10533 P10506/P10536 S00155		P10513/43/15/45 S00158 OR P10504 & S00174		DESIGN WIND PRESSURE
	MINIMUM W	H	MAXIMUM W	H	MAXIMUM W	H	MAXIMUM W	H	MAXIMUM W	H	
	800	400			3600	1350	3600	1350	3600	1350	800 pa
	800	400			3600	1350	3600	1350	3600	1350	1200 Pa
	800	400			3600	1275	3600	1325	3600	1350	1600 Pa
	800	400			3600	1200	3600	1250	3600	1350	2000 Pa
	800	400			3600	1150	3600	1200	3600	1350	2400 Pa
	800	800			1950	1350	1950	1350	1950	1350	800 pa
	800	800			1950	1350	1950	1350	1950	1350	1200 Pa
	800	800			1950	1275	1950	1325	1950	1350	1600 Pa
	800	800			1950	1200	1950	1250	1950	1350	2000 Pa
	800	800			1950	1150	1950	1200	1950	1350	2400 Pa
	800	800			3600	1525	3600	1600	3600	1775	800 pa
	800	800			3600	1375	3600	1425	3600	1600	1200 Pa
	800	800			3600	1275	3600	1325	3600	1475	1600 Pa
	800	800			3600	1200	3600	1250	3600	1400	2000 Pa
	800	800			3600	1150	3600	1200	3600	1350	2400 Pa
	800	800			1600	2000	1650	2000	1850	2000	800 pa
	800	800			1450	2000	1500	2000	1675	2000	1200 Pa
	800	800			1350	2000	1400	2000	1550	2000	1600 Pa
	800	800			1275	2000	1325	2000	1475	2000	2000 Pa
	800	800			1200	2000	1250	2000	1400	2000	2400 Pa
	1200	400			3600	1350	3600	1350	3600	1350	800 pa
	1200	400			3600	1350	3600	1350	3600	1350	1200 Pa
	1200	400			3600	1275	3600	1325	3600	1350	1600 Pa
	1200	400			3600	1200	3600	1250	3600	1350	2000 Pa
	1200	400			3600	1150	3600	1200	3600	1350	2400 Pa
	1200	800			3600	1350	3600	1350	3600	1350	800 pa
	1200	800			3600	1350	3600	1350	3600	1350	1200 Pa
	1200	800			3600	1275	3600	1325	3600	1350	1600 Pa
	1200	800			3600	1200	3600	1250	3600	1350	2000 Pa
	1200	800			3600	1150	3600	1200	3600	1350	2400 Pa
	1200	800			3600	1525	3600	1600	3600	1775	800 pa
	1200	800			3600	1375	3600	1425	3600	1600	1200 Pa
	1200	800			3600	1275	3600	1325	3600	1475	1600 Pa
	1200	800			3600	1200	3600	1250	3600	1400	2000 Pa
	1200	800			3600	1150	3600	1200	3600	1350	2400 Pa
OUTWARD OPENING FRENCH WINDOW 	800	400	1400	1350						800 pa	
	800	400	1400	1350						1200 Pa	
	800	400	1400	1350						1600 Pa	
	800	400	1400	1350						2000 Pa	
	800	400	1400	1350						2400 Pa	