



Features

Maximum sash sizes

Top hung: 1300mm (w) x 1300mm (h)

Outer frames

68mm outer frame

Mullions

84mm or 100mm mullions

Sash

68mm reversible sash

Finishes

Available in a large assortment of colours and woodgrain options from the Variations range and SPECTRAL*

Glazing beads

- 24mm sculptured
- 24mm bevelled
- 28mm sculptured
- 28mm bevelled
- 32mm sculptured
- 32mm bevelled
- 36mm bevelled

Ancillaries

- Frame extensions, cills and weathering trims
- Range of coupling options
- Range of bay pole options


Thermal performance**

Achieves U-values as low as 1.3 W/m²K using double glazing
Achieves U-values as low as 0.99 W/m²K using triple glazing

* SPECTRAL is only available on bevelled or flat surfaces.

** Figures can vary dependent on specification.

Technical Drawing

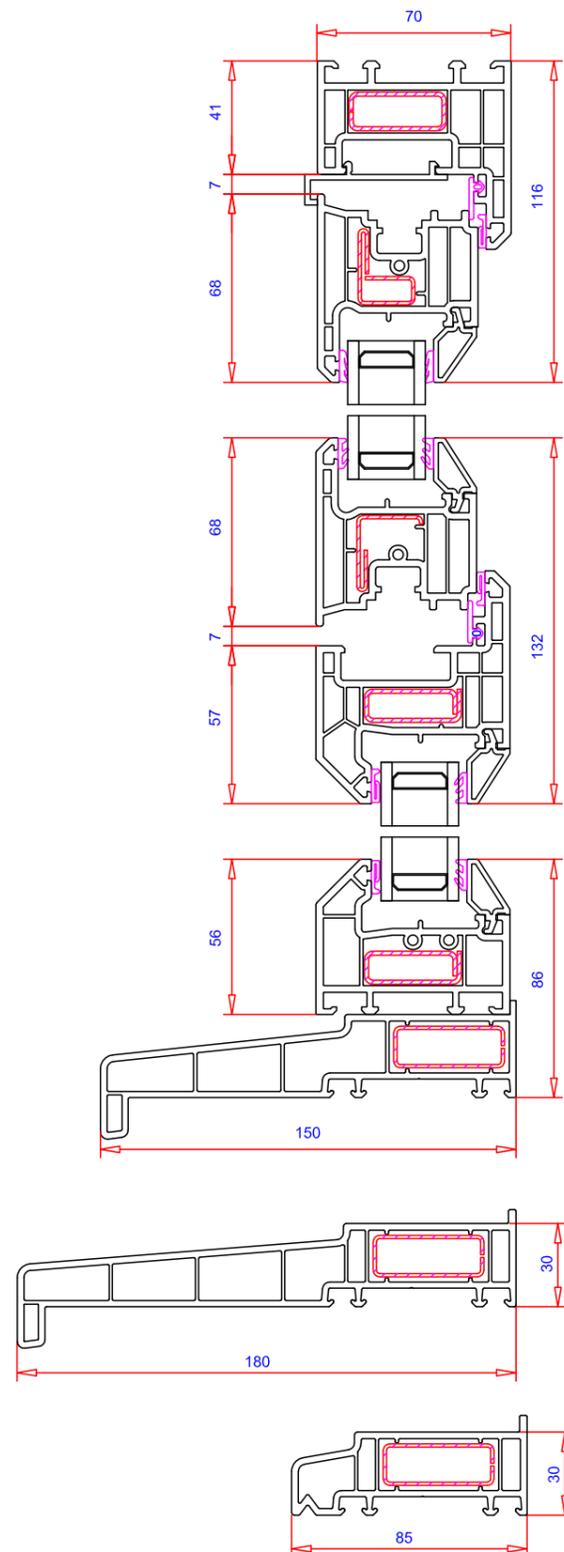

Test Results

Window type	Max sash sizes (wxh)	Air permeability	Water tightness	Resistance to wind	Exposure category
Top swing reinforced	1300mm x 1300mm	Class 3	Class E1050	AE2400	2400