



Features

Maximum sash sizes

Tilt & Turn: 1414mm (w) x 1414mm (h)

Outer frames

56mm, 72mm and 84mm outer frames

Mullions

70mm or 95mm mullions

Sash

Tilt & Turn sash

Finishes

Available in a large assortment of colours and woodgrain options from the Variations range and SPECTRAL*

Glazing beads

24mm sculptured
24mm bevelled
28mm sculptured
28mm bevelled
32mm sculptured
32mm bevelled
36mm bevelled
40mm bevelled

Ancillaries

Frame extensions, cills and weathering trims
Range of coupling options
Range of bay pole options


Thermal performance**

Achieves U-values as low as 1.3 W/m²K using double glazing
Achieves U-values as low as 1.0 W/m²K using triple glazing

* SPECTRAL is only available on bevelled or flat surfaces.

** Figures can vary dependent on specification.

Technical Drawing

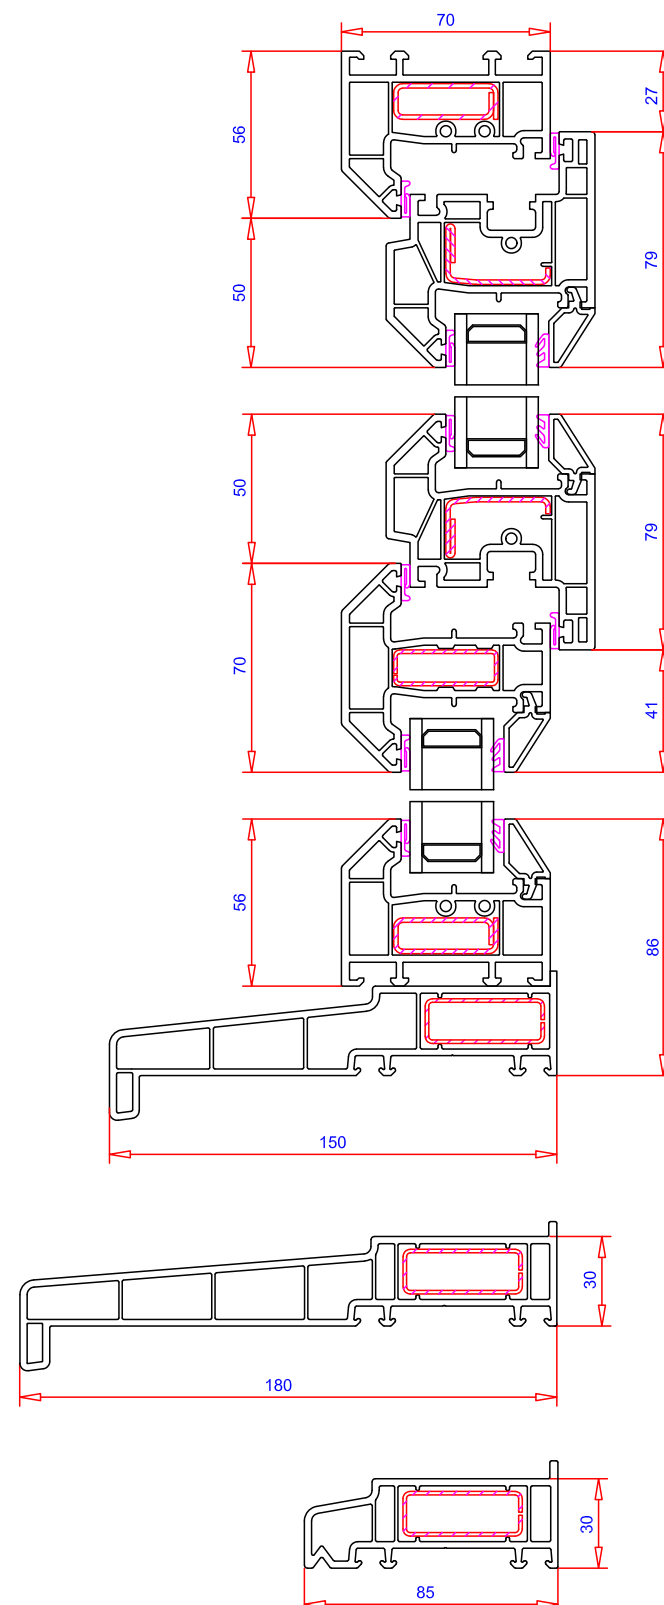

Test Results

Window type	Max sash sizes (wxh)	Air permeability	Water tightness	Resistance to wind	Exposure category
Tilt & Turn	1414mm x 1414mm	Class 4	Class E1050	A4	1600