Features

Maximum sash sizes

Top hung: 1300mm (w) x 1300mm (h)

Outer frames

68mm outer frame

Mullions

84mm or 100mm mullions

Sash

68mm reversible sash

Finishes

Available in a large assortment of colours and woodgrain options from the Variations range and SPECTRAL*

Glazing beads

24mm sculptured

24mm bevelled

28mm sculptured

28mm bevelled

32mm sculptured

32mm bevelled

36mm bevelled

Ancillaries


Frame extensions, cills and weathering trims Range of coupling options Range of bay pole options

Thermal performance**

Achieves U-values as low as 1.3 W/m²K using double glazing Achieves U-values as low as 0.99 W/m²K using triple glazing

- * SPECTRAL is only available on bevelled or flat surfaces.
- ** Figures can vary dependent on specification.

Technical Drawing

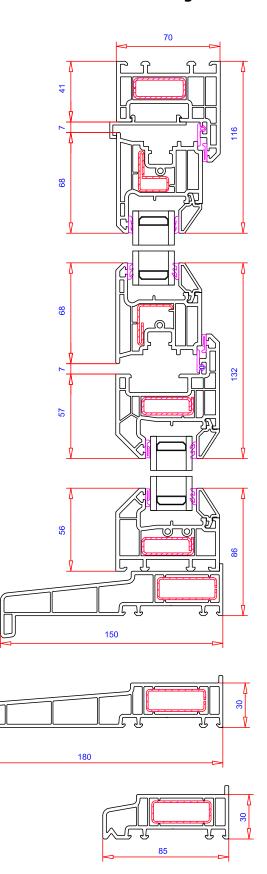



Test Results

Window type	Max sash sizes (wxh)	Air permeability	Water tightness	Resistance to wind	Exposure category
Top swing reinforced	1300mm x 1300mm	Class 3	Class E1050	AE2400	2400