



Features

Maximum sash size

Side hung: 620mm (w) x 1270mm (h)

Outer frames

56mm, 72mm and 84mm outer frames

Mullions

70mm or 95mm mullions

Sash

61mm flush sash

Finishes

Available in a large assortment of colours and woodgrain options from the Variations range and SPECTRAL*

Glazing beads

28mm bevelled
28mm sculptured
32mm bevelled
36mm bevelled

Ancillaries

Frame extensions, cills and weathering trims
Range of coupling options
Range of bay pole options


Thermal performance**

Achieves U-values as low as 1.2 W/m²K
using double glazing
Achieves U-values as low as 1.1 W/m²K
using triple glazing


* SPECTRAL is only available on bevelled or flat surfaces.

** Figures can vary dependent on specification.

Technical Drawing

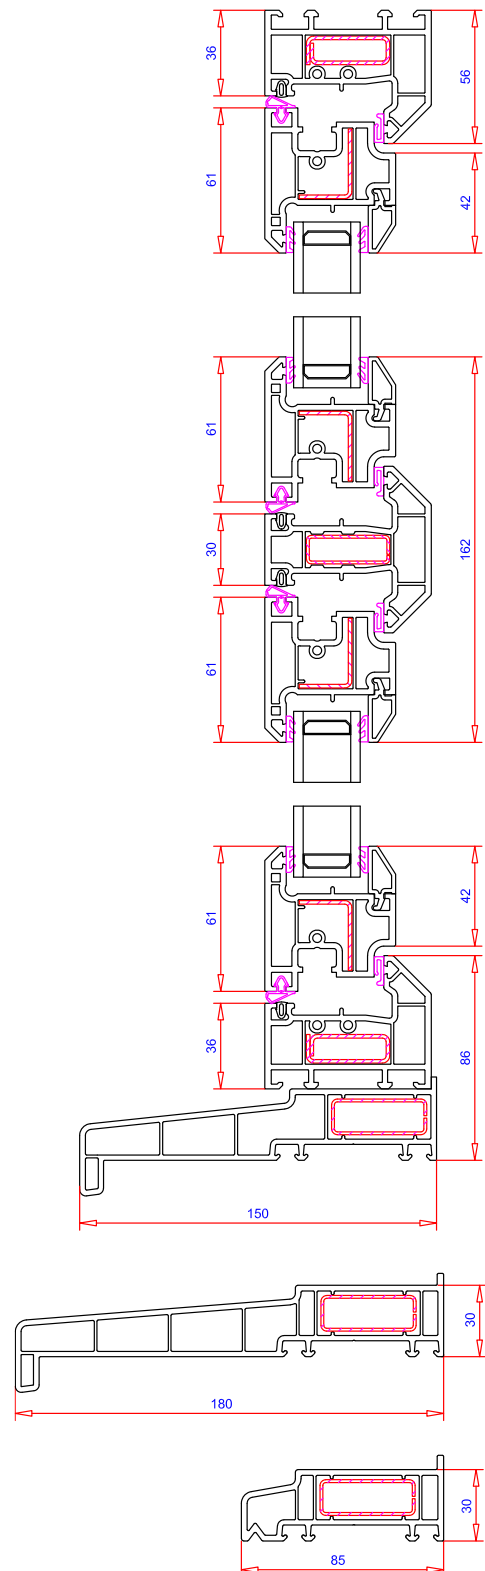

System 10
FlushSash
Casement
Window

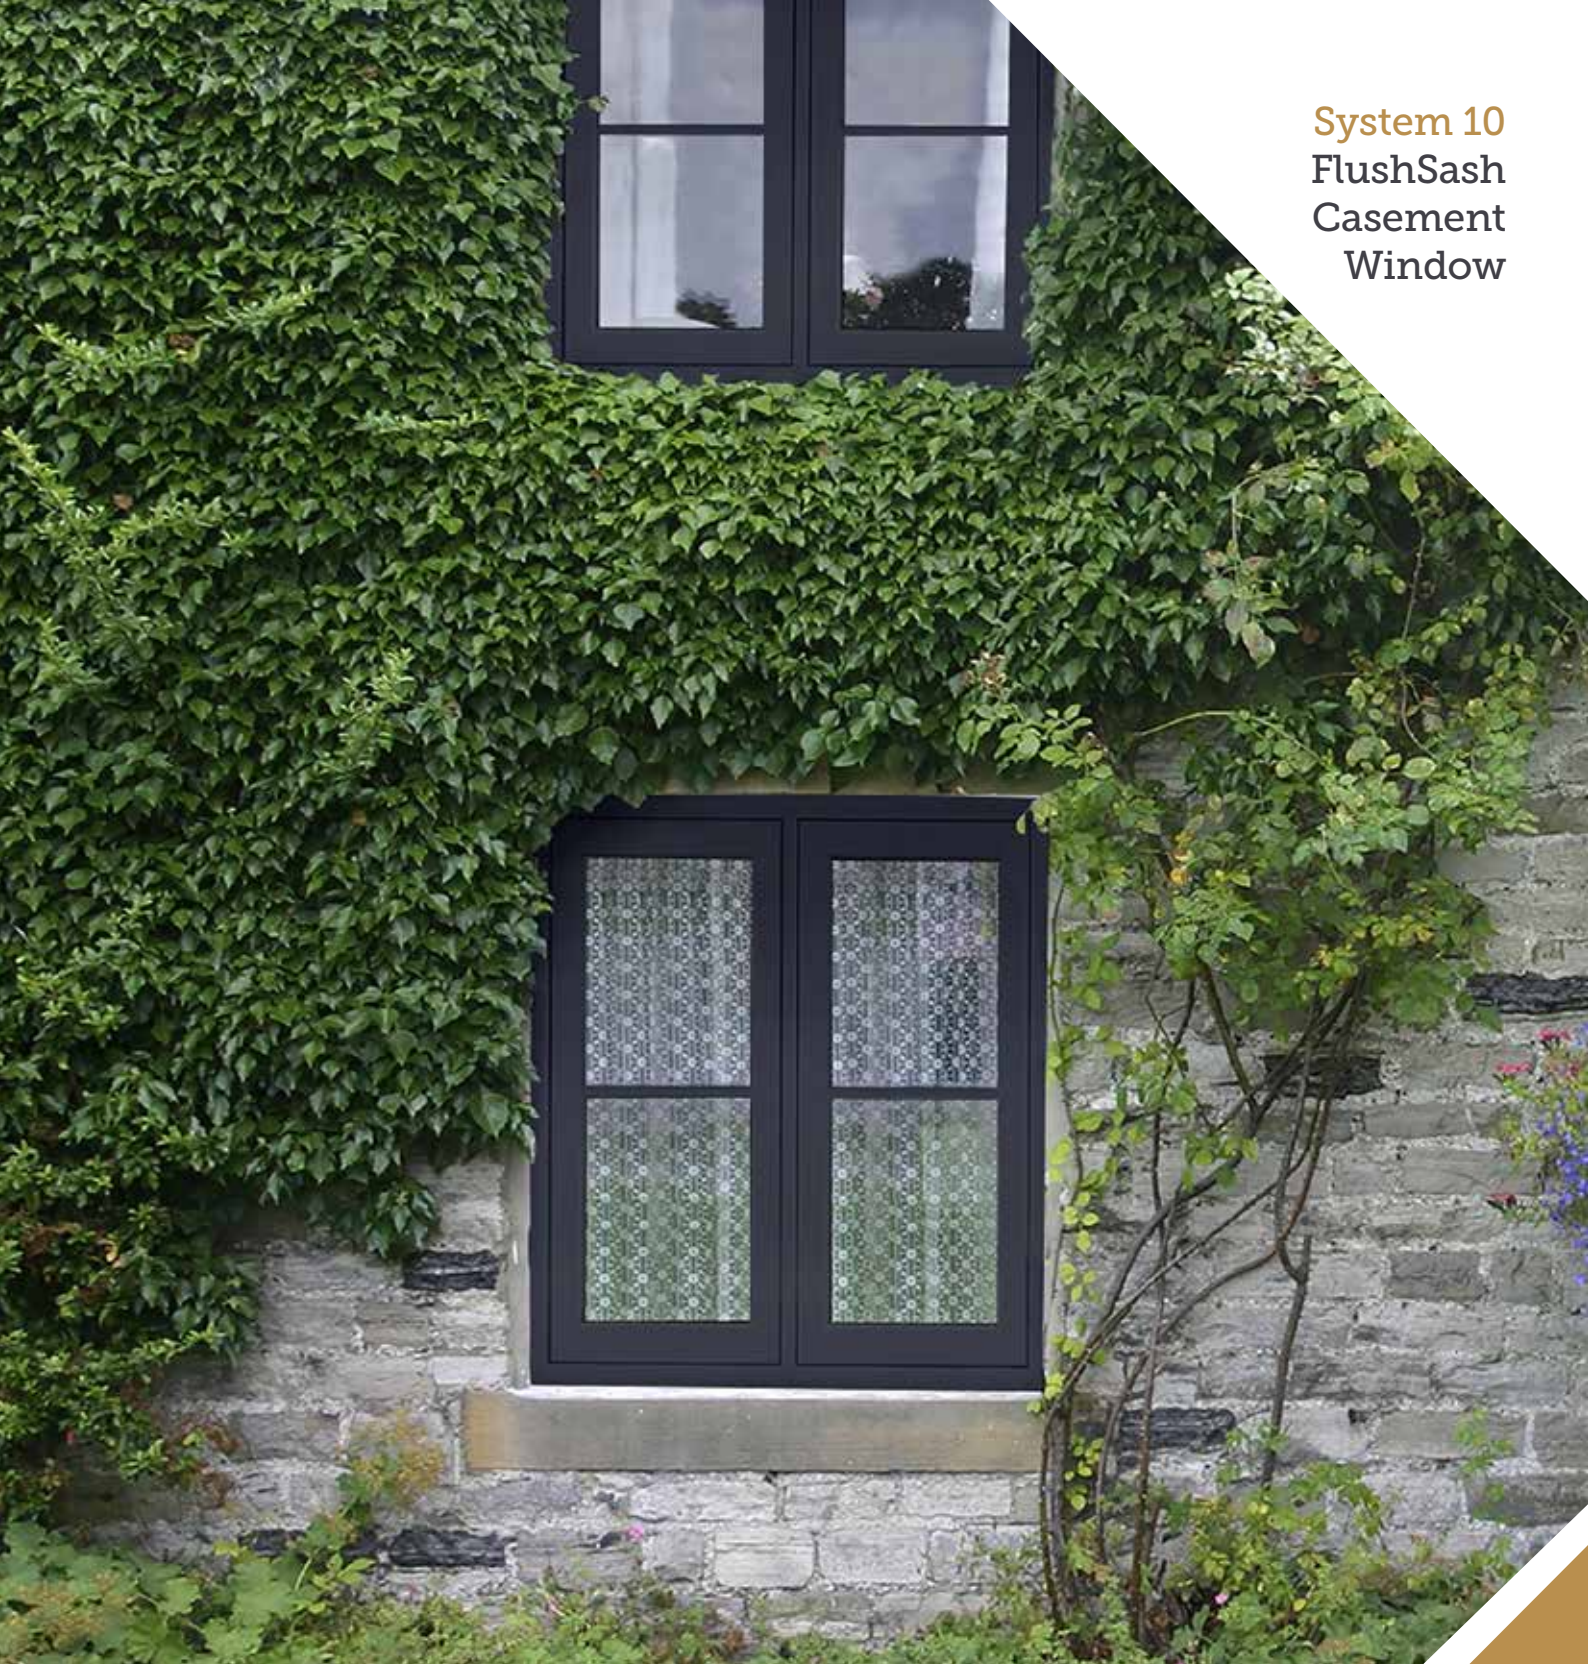

Test Results

| Window type | Max sash sizes (wxh) | Air permeability | Water tightness | Resistance to wind | Exposure category |
|----------------------|----------------------|------------------|-----------------|--------------------|-------------------|
| Side hung reinforced | 620mm x 1270mm | Class 4 | Class 9A | A4 | 1600 |