# **Features**

### Maximum sash sizes

Tilt & Turn: 1414mm (w) x 1414mm (h)

### **Outer frames**

56mm, 72mm and 84mm outer frames

#### Mullions

70mm or 95mm mullions

### Sash

Tilt & Turn sash

#### **Finishes**

Available in a large assortment of colours and woodgrain options from the Variations range and SPECTRAL\*

# **Glazing** beads

24mm sculptured

24mm bevelled

28mm sculptured

28mm bevelled

32mm sculptured

32mm bevelled

36mm bevelled

40mm bevelled

# Ancillaries


Frame extensions, cills and weathering trims Range of coupling options Range of bay pole options

# Thermal performance\*\*

Achieves U-values as low as 1.2 W/m<sup>2</sup>K using double glazing Achieves U-values as low as 1.0 W/m<sup>2</sup>K using triple glazing

- \* SPECTRAL is only available on bevelled or flat surfaces.
- \*\* Figures can vary dependent on specification.

# **Technical Drawing**

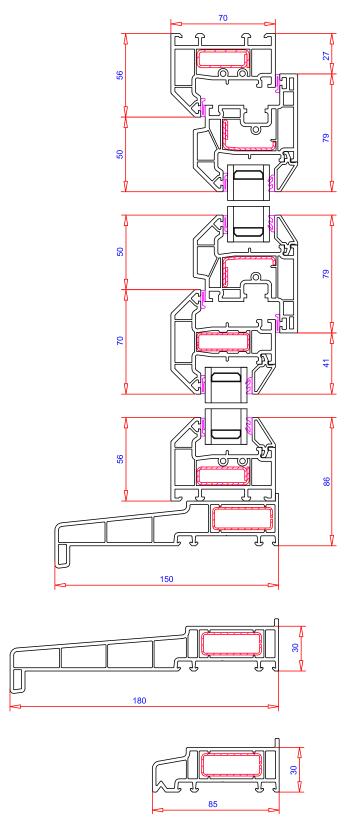



# **Test Results**

Window type	Max sash sizes (wxh)	Air permeability	Water tightness	Resistance to wind	Exposure category
Tilt & Turn	1414mm x 1414mm	Class 4	Class E1050	A4	1600