

## Features

### Maximum sash sizes

1400mm (w) x 2450mm (h)

### Outer frame

70mm x 146mm outer frame

### Sash

50mm upper sash

64mm lower sash

105mm lower sash bottom rail

### Finishes

Available in a large assortment of colours and woodgrain options from the Variations range

### Glazing beads

28mm sculptured

32mm sculptured

### Ancillaries

Frame extensions and cills

Range of coupling options


Range of bay pole options

### Thermal performance\*

Achieves U-values as low as 1.2 W/m<sup>2</sup>K using double glazing

\* Figures can vary dependent on specification.

## Technical Drawing

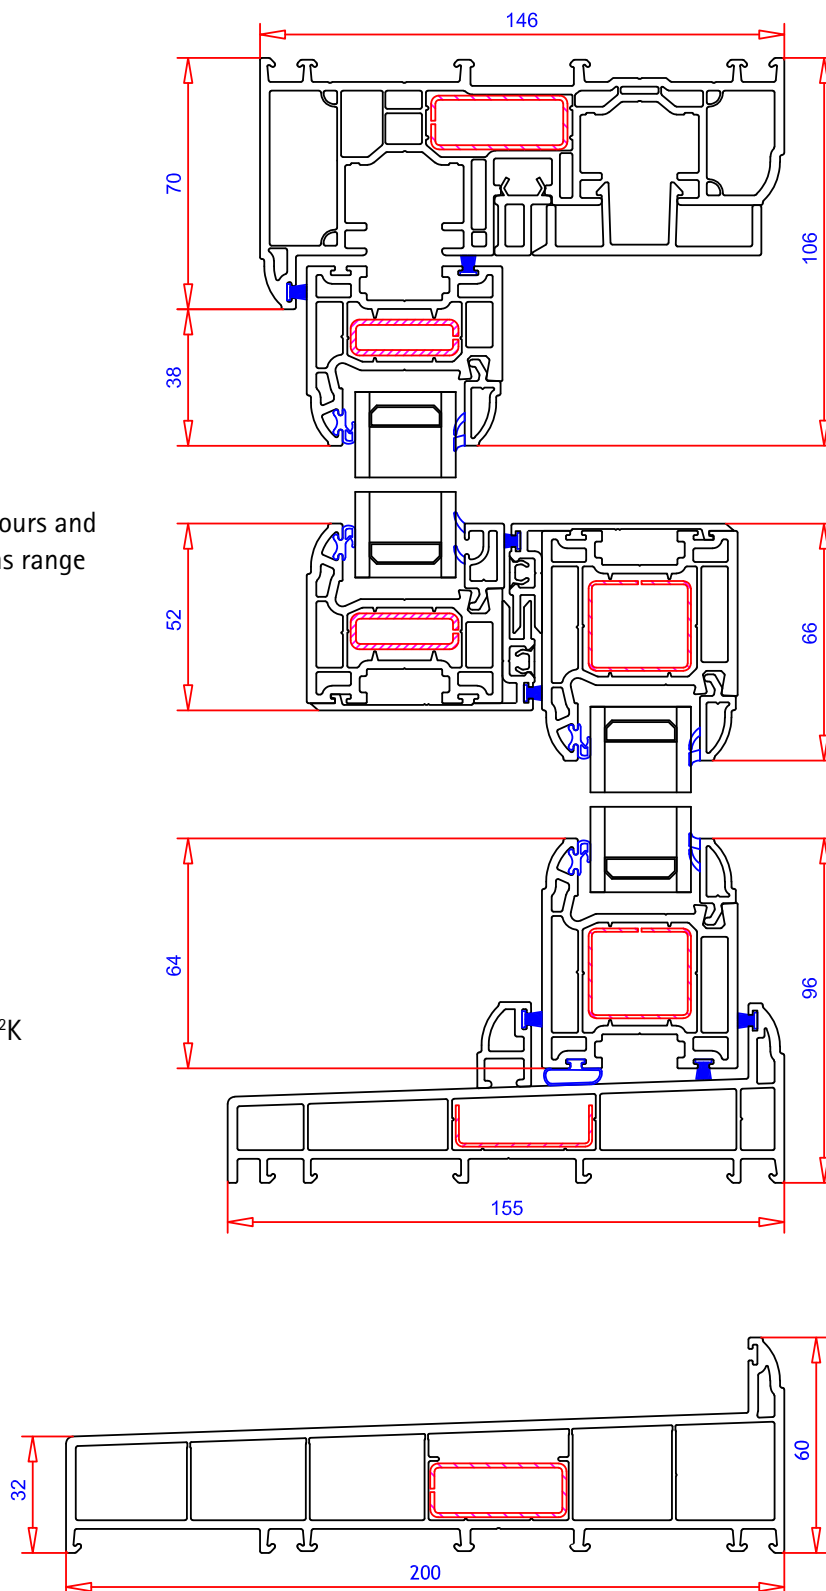



\*differs on Kitemark depending on hardware\*

## Test Results

Door type	Max sash sizes (wxh)	Air permeability	Water tightness	Resistance to wind	Exposure category
Vertical Slider	1400mm x 2450mm	Class 4	Class 7A	BE2400	2400